

ROBUST DESIGN HIGH QUALITY STAINLESS STEEL

BGR-4B GAS RANGE 4 BURNERS



	Staiplass stad tubing for burners and pilot	
	Stainless steel tubing for burners and pilot	
	 Stainless steel exterior including front, sides, kick plate, back guard & over shelf 	
	 Heavy duty 12" X 12" removable cast iron top grates 	
6	- Oven Temperature range between 175° & 500°F	
	– Oven cooking area: 26íw] x 26íb] x 15íb]	
	 Two (2) chrome oven rack per oven standard; 4 position oven rack guides. 	
	F Enamel interior oven for easy cleaning, with full width stainless steel crumb tray.	
	Fits bun pans either widthwise or lenghtwise.	
0	Dimensions (w×d×h) 24" × 31 ^{1/2} " × 56"	
	Cooking Area (w×d) $24'' \times 24''$	
	Burners LPG/NG: 1 x 30,000 BTU/H (OVEN)	
	LPG: 4 x 30,000 BTU/H (hot plates)	
	NG: 4 x 33,000 BTU/H (hot plates) LPG total: 150K NG total: 162K	
Optional caster wheels		

INFO@BRIKAEQUIPMENT.CA | 1.800.567.3620 | WWW.BRIKAEQUIPMENT.CA



BGR-4B

DELIVERY

Box dimensions (w×d×h) 26" × 36^{4/5}" × 38^{1/5}"

> Weight net: 268 lbs ship: 336 lbs



3/4" NPT 1 11/16" GAS INLET


GAS POWERED

Natural	Source	Propane
5"WC	Pressure	10"WC
40#	Nozzle (OVEN)	52#
41#	Nozzle (HOT P.)	52#


3/4" NPT Connection 3/4" NPT

if to be used above 2000 ft, specify altitude and gas type when ordering

FRONT VIEW

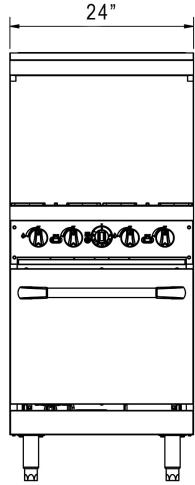

SIDE VIEW

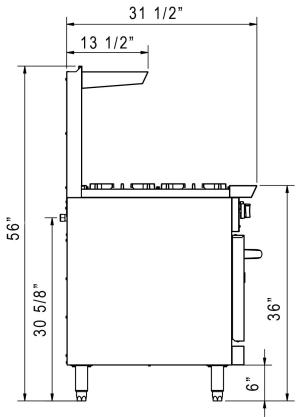





SAFETY

Keep combustibles a minimum of 17" away from the equipment. Keep a clearance of 4" at the rear.

f We're on social media! 💷

1.800.567.3620 | WWW.BRIKAEQUIPMENT.CA