



# BRIKA

## BFR-70

## FRYER 70 LBS

ROBUST DESIGN  
HIGH QUALITY STAINLESS STEEL



2 baskets included

Large cold zone with forward sloping bottom

Durable temperature probe senses temperature changes & activates quick burner response

Millivolt safety control system included

Temperature range 200-400°F

High efficiency 30K BTU burners with red flame diffuser

High flow 1<sup>1/4</sup> full post drain valve with pipe included



**Dimensions (wxdxh)** 21" x 32<sup>7/8</sup>" x 45"

**Cooking Area (wxd)** 19<sup>1/2</sup>" x 14"

**Oil Tank Capacity** 70 lbs ~36 L

**Burner** 5 x 30,000 BTU/H (total 150K)

# BFR-70

NG AND LPG FRYERS  
ARE DIFFERENT MODELS

## GAS POWERED

|         |                 |         |
|---------|-----------------|---------|
| Natural | <b>Source</b>   | Propane |
| 4"WC    | <b>Pressure</b> | 10"WC   |
| 39#     | <b>Nozzle</b>   | 52#     |

3/4" NPT **Connection** 3/4" NPT

if to be used above 2000 ft, specify altitude and gas type when ordering

## DELIVERY

**Box dimensions (wxdxh)**


23<sup>3/8"</sup> x 35<sup>3/8"</sup> x 37<sup>5/8"</sup>

**Weight**


net: 220 lbs

ship: 247 lbs


## INTERIOR TANK DIMENSIONS

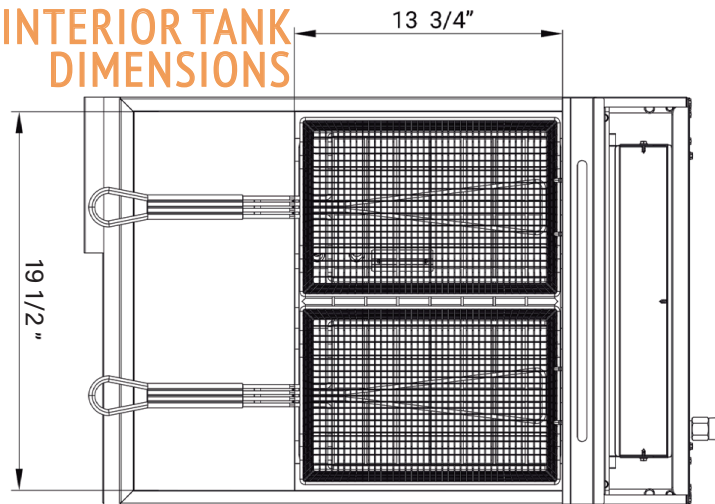

## FRONT VIEW

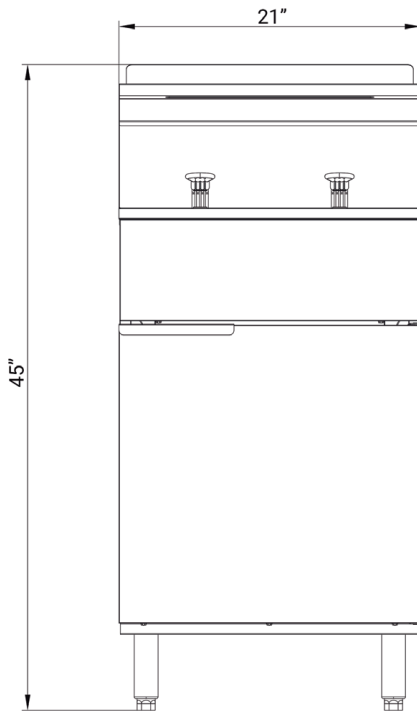

## SIDE VIEW

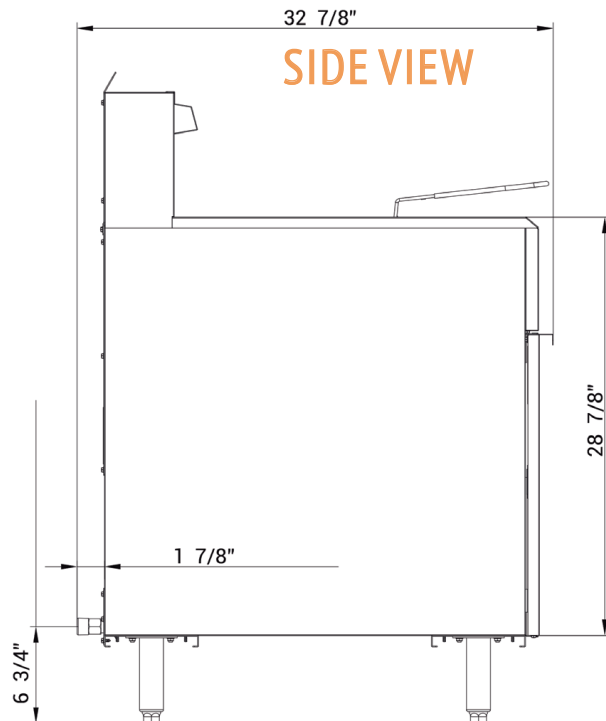

ASSEMBLY/SUPPORT



MORE PRODUCTS



## SAFETY

Keep combustibles a minimum of 17" away from the equipment. Keep a clearance of 4" at the rear.

**f We're on social media!** 

1.800.567.3620 | WWW.BRIKAEQUIPMENT.CA