

ROBUST DESIGN HIGH QUALITY STAINLESS STEEL

BGR-10B GAS RANGE 10 BURNERS

0-000-0



Stainless steel tubing for burners and pilot

Stainless steel exterior including front, sides, kick plate, back guard & over shelf

Heavy duty 12" X 12" removable cast iron top grates

Oven Temperature range between 175° & 500°F

Oven cooking area: 26(w) x 26(b) x 15(H)

 Two (2) chrome oven rack per oven standard; 4 position oven rack guides.

Enamel interior oven for easy cleaning, with full width stainless steel crumb tray.

Fits bun pans either widthwise or lenghtwise.

Dimensions (w×d×h) 60" × 31^{1/2}" × 56"

Cooking Area (w×d) $60'' \times 24''$

Burners LPG/NG: 2 x 35,000 BTU/H (oven) LPG: 10 x 30,000 BTU/H (hot plates) NG: 10 x 33,000 BTU/H (hot plates) LPG total: 370K NG total: 400K

Optional caster wheels

0-0.04-0

0-0

INFO@BRIKAEQUIPMENT.CA | 1.800.567.3620 | WWW.BRIKAEQUIPMENT.CA



BGR-10B

DELIVERY

Box dimensions (w×d×h) 62" x 36^{4/5}" x 38^{1/5}"


> Weight net: 598 lbs ship: 716 lbs

GAS POWERED

Natural	Source	Propane
5"WC	Pressure	10"WC
38#	Nozzle (OVEN)	49#
41#	Nozzle (HOT P.)	52#


3/4" NPT Connection 3/4" NPT

if to be used above 2000 ft, specify altitude and gas type when ordering

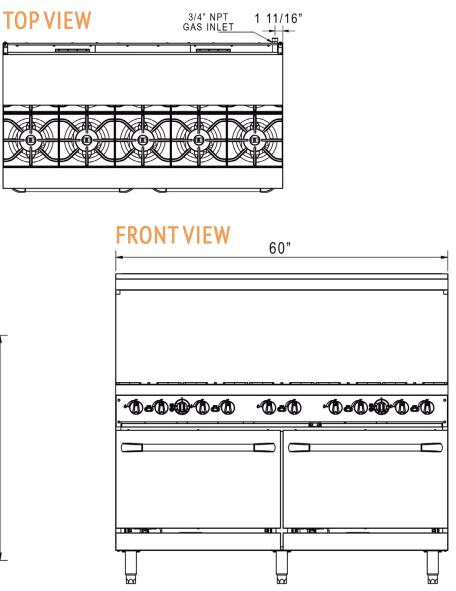

Keep combustibles a minimum of 17" away from the equipment. Keep a clearance of 4" at the rear.

f We're on social media! 💷

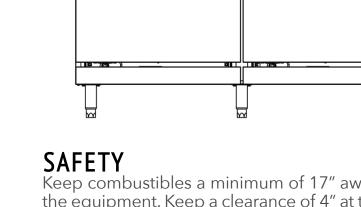

1.800.567.3620 | WWW.BRIKAEQUIPMENT.CA



