



# BRIKA

## BFR-50

ROBUST DESIGN  
HIGH QUALITY STAINLESS STEEL

# FRYER 50 LBS



2 baskets included

Large cold zone with forward sloping bottom

Durable temperature probe senses temperature changes & activates quick burner response

Millivolt safety control system included

Temperature range 200-400°F

High efficiency 30K BTU burners with red flame diffuser

High flow 1<sup>1/4</sup> full post drain valve with pipe included



**Dimensions (wxdxh)** 15<sup>1/2</sup>" x 32<sup>7/8</sup>" x 45"

**Cooking Area (wxd)** 14" x 13<sup>3/4</sup>"

**Oil Tank Capacity** 50 lbs ~25.75 L

**Burners** 4 x 30,000 BTU/H (total 120K)

# BFR-50

NG AND LPG FRYERS  
ARE DIFFERENT MODELS

## GAS POWERED

Natural	<b>Source</b>	Propane
4"WC	<b>Pressure</b>	10"WC
39#	<b>Nozzle</b>	52#

3/4" NPT **Connection** 3/4" NPT

if to be used above 2000 ft, specify altitude and gas type when ordering

## DELIVERY

**Box dimensions (w×d×h)**


17<sup>7/8</sup>" x 35<sup>3/8</sup>" x 37<sup>5/8</sup>"

### Weight


net: 176 lbs

ship: 198 lbs


### INTERIOR TANK DIMENSIONS

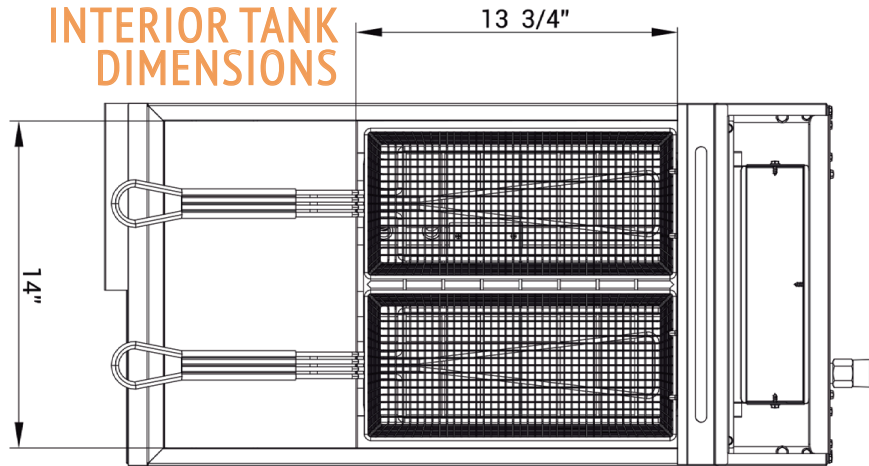

### FRONT VIEW

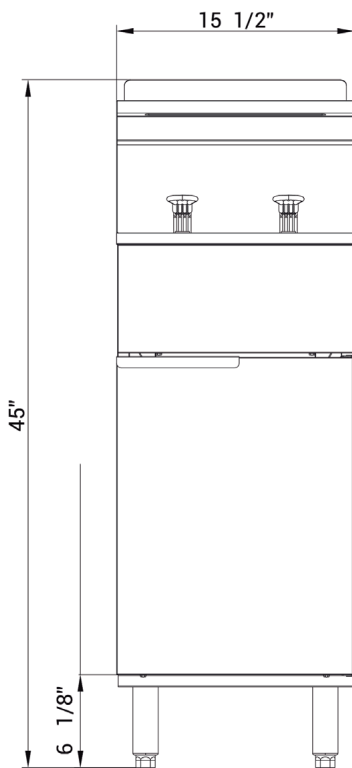

### SIDE VIEW

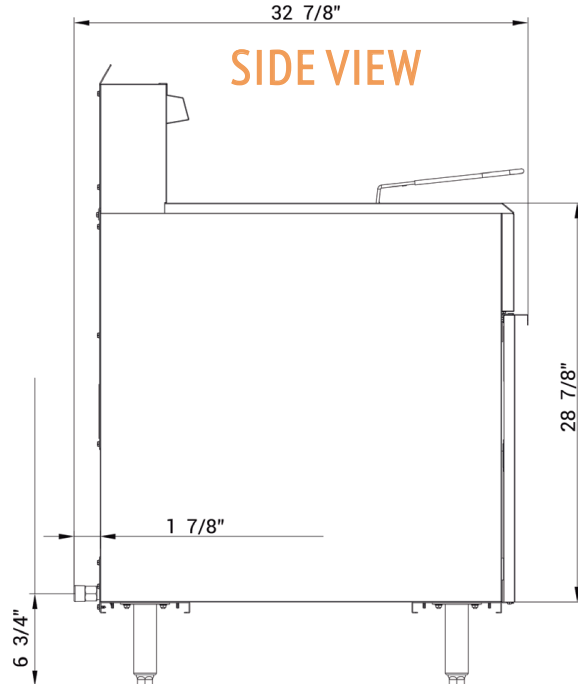

### ASSEMBLY/SUPPORT



### MORE PRODUCTS



## SAFETY

Keep combustibles a minimum of 17" away from the equipment. Keep a clearance of 4" at the rear.

 We're on social media! 